




## Vertical Energy Recovery Ventilator



- 3 FILTER**  
Triple filtration
- 99% HEPA filtration**  
99% HEPA filtration
- Indoor slight positive pressure**  
Indoor slight positive pressure
- Visual management LCD display**  
Visual management LCD display
- Colorful design**  
Colorful design
- High efficiency energy recovery rate**  
High efficiency energy recovery rate
- Remote control**  
Remote control
- Optional high efficiency fan with DC motors**  
Optional high efficiency fan with DC motors

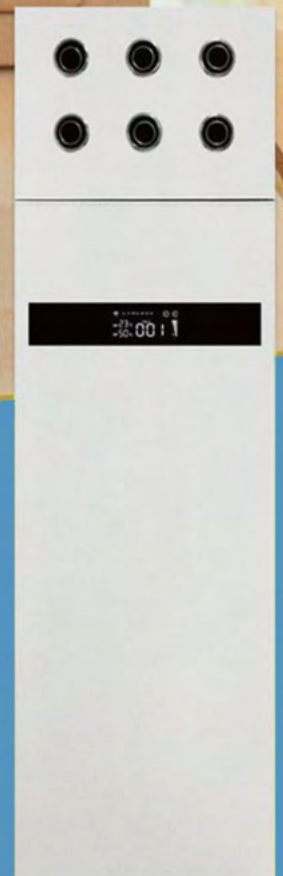

### ■ Technical parameters

| Model                                | ERVQ - L300 - 1A1F                        | ERVQ - L600 - 1A1F                        |
|--------------------------------------|---|---|
| Airflow (m <sup>3</sup> /h)          | 300                                       | 600                                       |
| Filtration efficiency (%)            | 99 % / HEPA                               | 99 % / HEPA                               |
| Filtration mode                      | Pm2.5 purify / Deep purify / Ultra purify | Pm2.5 purify / Deep purify / Ultra purify |
| Speed                                | DC / 8 speed                              | DC / 8 speed                              |
| Input power (W)                      | 70  | 125                                       |
| Temperature efficiency (%)           | 82 %                                      | 82 %                                      |
| Noise dB(A)                          | 25 - 36                                   | 25 - 36                                   |
| Control                              | Touch screen panel / Remote control       | Touch screen panel / Remote control       |
| Air quality display                  | PM2.5 / Temp & R.H                        | PM2.5 / Temp & R.H                        |
| Operational Mode                     | Manual / Auto / Timer                     | Manual / Auto / Timer                     |
| Suitable room size (m <sup>2</sup> ) | 50 - 120                                  | 100 - 240                                 |
| Dimension (mm)                       | 560*410*1580                              | 560*460*1700                              |
| Weight (kg)                          | 55  | 65  |

